


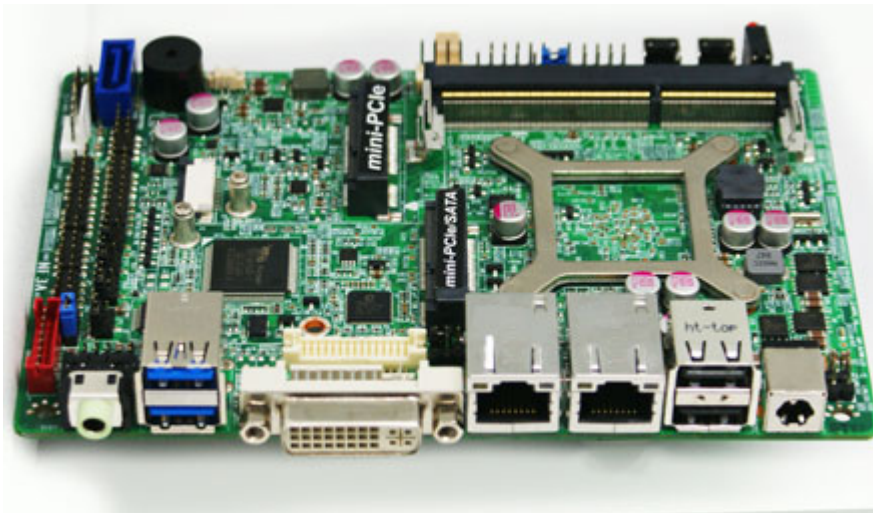

249.00 EUR

incl. 19% VAT, plus [shipping](#)

- INTEL® Bay Trail-M N2930 SoC Processor (QC, 1.83G)
- INTEL® Bay Trail-I E3827 SoC Processor (DC, 1.75G)
- Support 1 \* DDR3L 1333/1066MHz Single CH up to 4GB
- Support 1 \* Serial ATAI (3Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 2-CH
- 1 \* 24 bits Dual Channel LVDS header
- Support DVI-I Output
- Supports 2 \* Realtek RT8111G Gigabit LAN
- Support CPU Smart FAN
- 148 x 102mm 3.5" SBC Form Factor

|                         |                                                                                                                                                                                                                                                                                                                 |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CPU</b>              | INTEL® Bay Trail-I E3827 SoC Processor (DC, 1.75G)                                                                                                                                                                                                                                                              |
| <b>Chipset</b>          | N/A                                                                                                                                                                                                                                                                                                             |
| <b>Memory</b>           | 1 * DDR3L 1333/1066MHz Single CH SO-DIMM up to 4GB                                                                                                                                                                                                                                                              |
| <b>Expansion Slots</b>  | 2 * MINI PCI-E (one share with mSATA) socket                                                                                                                                                                                                                                                                    |
| <b>Storage</b>          | 1 * Serial ATAI 3Gb/s connector<br>1 * mSATA socket                                                                                                                                                                                                                                                             |
| <b>Audio</b>            | Realtek ALC662 HD Audio CODEC with 2-Channel                                                                                                                                                                                                                                                                    |
| <b>Ethernet LAN</b>     | 2 * RTL8111G PCI-E Gigabit LAN                                                                                                                                                                                                                                                                                  |
| <b>USB</b>              | Embedded 1 * USB 3.0 + 7 * USB 2.0/1.1                                                                                                                                                                                                                                                                          |
| <b>LVDS</b>             | Onboard 1 * 24-bits Dual channel LVDS connector                                                                                                                                                                                                                                                                 |
| <b>Rear Panel I / O</b> | 1 * USB 3.0 port<br>3 * USB 2.0/1.1 ports<br>2 * RJ-45 ports<br>1 * Line-out port<br>1 * DVI-I port<br>1 * one-pin 9~24V DC-IN Jack                                                                                                                                                                             |
| <b>Internal I / O</b>   | 2 * USB 2.0 header for 4 * USB 2.0 ports<br>1 * KB/MS header<br>1 * Audio header & 1 * HDMI-SPDIF header<br>Chassis Fan Connectors<br>1 * GPIO header<br>4 * COM headers (COM1 support RS232/422/485) & 4 * COM ports 5V/12V Selectable headers<br>1 * chassis intrusion header & 1 * AT mode selectable header |
| <b>BIOS</b>             | AMI 64MB SMT Flash ROM                                                                                                                                                                                                                                                                                          |
| <b>Form Factor</b>      | 3.5" SBC form factor (148mmx102mm)                                                                                                                                                                                                                                                                              |

|                    |                                                                                                                                                                 |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Certificate</b> | CE,FCC,RoHS,ERP                                                                                                                                                 |
| <b>Functional</b>  | ATM, Automation, Medical Equipment, Security, General Application, Transportation, Digital Signage, Kiosk, POS machine, LCD TV PC, Embedded Fanless application |
| <b>Temperature</b> | Operating within 0~60 centigrade<br>Storage within -20-85 centigrade                                                                                            |