


32.95 EUR  
incl. 19% VAT, plus [shipping](#)

- TS256GMTS430S !
- 42 mm !
- 256GB !
- 3D-NAND !

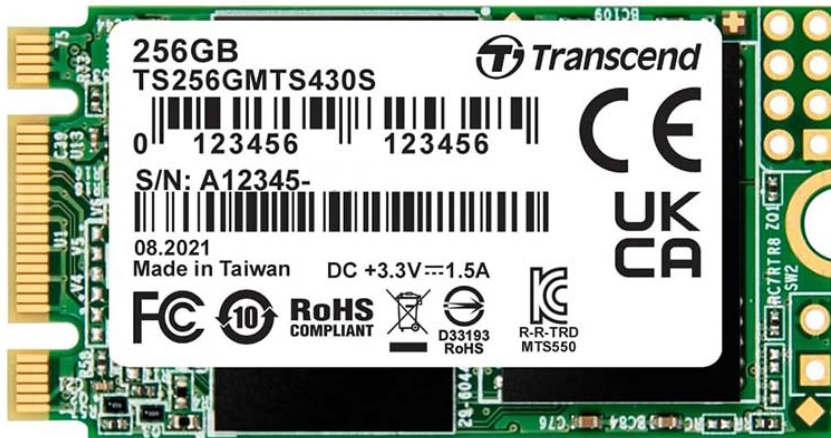

Utilizing the SATA III 6Gb/s interface and the latest 3D NAND technology, Transcend's ultra-compact M.2 SSD 430S is ideally suited to meet the high-performance requirements and strict size constraints of small form factor devices. Utilizing high-quality flash chips and advanced firmware algorithms, the Transcend M.2 SSD 430S offers unparalleled reliability.

- 550 MB/s read speed - 450 MB/s write speed
- Long endurance
- Lower power consumption
- Easy installation without additional drivers

|                                                  |                                                                                                                                         |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Schnittstelle</b>                             | SATA III 6Gb/s                                                                                                                          |
| <b>Flash-Typ</b>                                 | 3D NAND Flas                                                                                                                            |
| <b>Kapazität</b>                                 | 256 GB                                                                                                                                  |
| <b>Sequenzielles Lesen/Schreiben (MB/s, max)</b> | 530 / 400                                                                                                                               |
| <b>Abmessungen (BxLxH)</b>                       | 42,0 mm x 22,0 mm x 3,58 mm (1,65" x 0,87" x 0,14") / 5g                                                                                |
| <b>Umgebung</b>                                  | Vibration: 20G @7~2000Hz<br>Schock: 1500G @ 0,5ms<br>Betriebstemperatur: -40°C ~ +85°C<br>MTBF: 2.000.000 Stunde(n)                     |
| <b>Zertifikate</b>                               | <ul style="list-style-type: none"> <li>• CE/</li> <li>• UKCA/</li> <li>• FCC/</li> <li>• BSMI/</li> <li>• KC/</li> <li>• RCM</li> </ul> |